

# Large Language Monkeys: Scaling Inference Compute with Repeated Sampling

Bradley Brown<sup>\*†‡</sup>, Jordan Juravsky<sup>\*†</sup>, Ryan Ehrlich<sup>\*†</sup>, Ronald Clark<sup>‡</sup>, Quoc V. Le<sup>§</sup>,  
Christopher Ré<sup>†</sup>, and Azalia Mirhoseini<sup>†§</sup>

<sup>†</sup>Department of Computer Science, Stanford University

<sup>‡</sup>University of Oxford

<sup>§</sup>Google DeepMind

bradley.brown@cs.ox.ac.uk, jbj@stanford.edu, ryanehrlich@cs.stanford.edu,  
ronald.clark@cs.ox.ac.uk, qvl@google.com, chrismre@stanford.edu,  
azalia@stanford.edu

July 31, 2024

## Abstract

Scaling the amount of compute used to train language models has dramatically improved their capabilities. However, when it comes to inference, we often limit the amount of compute to only one attempt per problem. Here, we explore inference compute as another axis for scaling by increasing the number of generated samples. Across multiple tasks and models, we observe that coverage – the fraction of problems solved by any attempt – scales with the number of samples over four orders of magnitude. In domains like coding and formal proofs, where all answers can be automatically verified, these increases in coverage directly translate into improved performance. When we apply repeated sampling to SWE-bench Lite, the fraction of issues solved with DeepSeek-V2-Coder-Instruct increases from 15.9% with one sample to 56% with 250 samples, outperforming the single-attempt state-of-the-art of 43% which uses more capable frontier models. Moreover, using current API pricing, amplifying the cheaper DeepSeek model with five samples is more cost-effective and solves more issues than paying a premium for one sample from GPT-4o or Claude 3.5 Sonnet. Interestingly, the relationship between coverage and the number of samples is often log-linear and can be modelled with an exponentiated power law, suggesting the existence of inference-time scaling laws. Finally, we find that identifying correct samples out of many generations remains an important direction for future research in domains without automatic verifiers. When solving math word problems from GSM8K and MATH, coverage with Llama-3 models grows to over 95% with 10,000 samples. However, common methods to pick correct solutions from a sample collection, such as majority voting or reward models, plateau beyond several hundred samples and fail to fully scale with the sample budget.

## 1 Introduction

The ability of large language models (LLMs) to solve coding, mathematics, and other reasoning tasks has improved dramatically over the past several years [42, 11]. Scaling up model training has been a consistent driver of these gains. Investments in larger models, larger pre-training datasets, and more extensive post-training (e.g. through collecting human preference labels) has led to remarkably capable generalist systems [2, 3, 4, 47].

---

Title inspired by [https://en.m.wikipedia.org/wiki/Infinite\\_monkey\\_theorem](https://en.m.wikipedia.org/wiki/Infinite_monkey_theorem).

\* Equal Contribution. Work done by BB as a visiting researcher at Stanford.

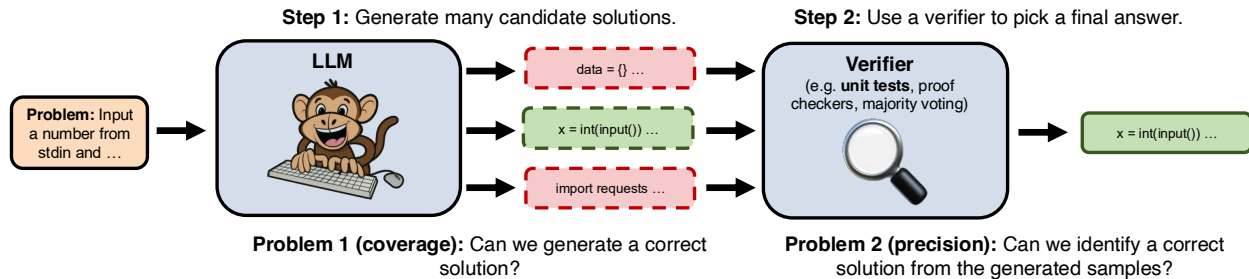


Figure 1: The repeated sampling procedure that we follow in this paper. 1) We generate many candidate solutions for a given problem by sampling from an LLM with a positive temperature. 2) We use a domain-specific verifier (ex. unit tests for code) to select a final answer from the generated samples.

In contrast, a comparatively limited investment has been made in scaling the amount of computation used during inference. Larger models do require more inference compute than smaller ones, and prompting techniques like chain-of-thought [56] can increase answer quality at the cost of longer (and therefore more computationally expensive) outputs. However, when interacting with LLMs, users and developers often restrict models to making only one attempt when solving a problem. In this work, we investigate repeated sampling (depicted in Figure 1) as an alternative axis for scaling inference compute to improve LLM reasoning performance.

The effectiveness of repeated sampling is determined by two key properties:

1. Coverage: As the number of samples increases, what fraction of problems can we solve using any sample that was generated?
2. Precision: In settings where we must select a final answer from the collection of generated samples, can we identify correct samples?

With unlimited attempts, any model that assigns a non-zero probability to every sequence will achieve perfect coverage. However, repeated sampling is only practical if we can improve coverage with a feasible budget. Moreover, without the ability to decide between samples, the applications of repeated sampling are limited. Existing work provides encouraging evidence along both of these directions, showing examples of repeated sampling improving performance in math, coding, and puzzle-solving settings [55, 43, 22]. Notably, AlphaCode [37], a state-of-the-art system for competitive programming, finds that performance continues to improve with a million samples per problem.

Here, we show that repeated sampling is an effective methodology for improving coverage across a range of tasks, models, and sample budgets. For example, when solving CodeContests [37] programming problems using Gemma-2B [48], we increase coverage by over 300x as we scale the number of samples, from 0.02% with one attempt to 7.1% with 10,000 attempts. Interestingly, the relationship between  $\log(\text{coverage})$  and the number of samples often follows an approximate power law. With Llama-3 [3] and Gemma models, we observe that coverage grows nearly log-linearly with the number of samples over several orders of magnitude.

In settings where all of a model’s solutions can be automatically verified, such as with proof checkers or unit tests, these increases in coverage translate directly into improved task performance. When applying repeated sampling to competitive programming and writing Lean proofs, models like Llama-3-8B-Instruct can exceed the single-attempt performance of much stronger ones like GPT-4o [2]. This ability to amplify weaker models extends to the challenging SWE-bench Lite dataset of real-life GitHub issues [30], where the current single-attempt state-of-the-art (SOTA), achieved by

a mixture of GPT-4o and Claude 3.5 Sonnet models, is 43% [1]. When given a single attempt, DeepSeek-Coder-V2-Instruct [19] achieves only 15.9% on the benchmark. By simply increasing the number of attempts to 250, we increase the fraction of solved problems to 56%, exceeding the single-attempt state-of-the-art by 13%.

In addition to improving model quality, repeated sampling provides a new mechanism for minimizing LLM inference costs. When holding the total number of inference FLOPs constant, we find that on some datasets (e.g. MATH) coverage is maximized with a smaller model and more attempts, while on others (e.g CodeContests) it is better to use a larger model. We also compare API prices between DeepSeek-V2-Coder-Instruct, GPT-4o, and Claude Sonnet 3.5 in the context of solving SWE-bench Lite issues. When keeping the agent framework (Moatless Tools [62]) constant, sampling five times from the weaker and cheaper DeepSeek model solves more issues than single attempts from Claude or GPT, while also being over 3x cheaper.

Finally, in math word problem settings, where answers cannot be automatically verified by existing tools, we identify a large gap between coverage and the performance of common methods for deciding on a final answer. When solving MATH [24] problems with Llama-3-8B-Instruct, coverage increases from 79.8% with 100 samples to 95.3% with 10,000 samples. However, methods such as majority voting and using reward models plateau with a lower sample budget, scaling only from 38.7% to 39.8% over the same range. These results highlight that building robust verifiers remains an open problem.

In summary, our primary observations are:

1. We demonstrate that scaling inference compute through repeated sampling leads to large improvements in coverage across a variety of tasks, models, and sample budgets. This makes it possible, and sometimes cost-effective, to amplify weaker models with many samples and outperform single attempts from more capable models. Notably, we are able to solve 56% of issues from SWE-bench Lite by sampling 250 times from DeepSeek-V2-Coder-Instruct, exceeding the single-attempt SOTA of 43%.
2. We show that the relationship between coverage and the number of samples can often be modelled using an exponentiated power law, suggesting a form of scaling laws for inference-time compute.
3. In domains without automatic verifiers, we show that common approaches to verification like majority voting and reward model scoring plateau beyond approximately 100 samples. This leads to a growing gap between the performance achieved with these methods and the coverage upper bound.

## 2 Scaling Repeated Sampling

We focus on pass-fail tasks where a candidate solution can be scored as right or wrong. The primary metric of interest for these tasks is the *success rate*: the fraction of problems that we are able to solve. With repeated sampling, we consider a setup where a model can generate many candidate solutions while attempting to solve a problem. The success rate is therefore influenced both by the ability to generate correct samples for many problems (i.e. coverage), as well as the ability to identify these correct samples (i.e. precision).

The difficulty of the precision problem depends on the availability of tools for sample verification. When proving formal statements in Lean, proof checkers can quickly identify whether a candidate solution is correct. Similarly, unit tests can be used to verify candidate solutions to coding tasks.

In these cases, precision is handled automatically, and improving coverage directly translates into higher success rates. In contrast, the tools available for verifying solutions to math word problems from GSM8K and MATH are limited, necessitating additional verification methods that decide on a single final answer from many (often conflicting) samples.

We consider the following five tasks:

1. **GSM8K**: A dataset of grade-school level math word problems [18]. We evaluate on a random subset of 128 problems from the GSM8K test set.
2. **MATH**: Another dataset of math word problems that are generally harder than those from GSM8K [13]. Similarly, we evaluate on 128 random problems from this dataset’s test set.
3. **MiniF2F-MATH**: A dataset of mathematics problems that have been formalized into proof checking languages [60]. We use Lean4 as our language, and evaluate on the 130 test set problems that are formalized from the MATH dataset.
4. **CodeContests**: A dataset of competitive programming problems [37]. Each problem has a text description, along with a set of input-output test cases (hidden from the model) that can be used to verify the correctness of a candidate solution. We enforce that models write their solutions using Python3.
5. **SWE-bench Lite**: A dataset of real world Github issues, where each problem consists of a description and a snapshot of a code repository [30]. To solve a problem, models must edit files in the codebase (in the Lite subset of SWE-bench that we use, only a single file needs to be changed). Candidate solutions can be automatically checked using the repository’s suite of unit tests.

Among these tasks, MiniF2F-MATH, CodeContests, and SWE-bench Lite have automatic verifiers (in the form of the Lean4 proof checker, test cases, and unit test suites, respectively). We begin by investigating how repeated sampling improves model coverage. Coverage improvements correspond directly with increased success rates for tasks with automatic verifiers and in the general case provide an upper bound on the success rate. In coding settings, our definition of coverage is equivalent to the commonly-used pass@k metric [15], where  $k$  denotes the number of samples per problem. We use this metric directly when evaluating on CodeContests and SWE-bench Lite. For MiniF2F the metric is similar, with a “pass” defined according to the Lean4 proof checker. For GSM8K and MATH, coverage corresponds to using an oracle verifier that checks if any sample “passes” by outputting the correct final answer. To reduce the variance when calculating coverage, we adopt the unbiased estimation formula from Chen et al. [15]. In each experiment, we first generate  $N$  samples for each problem index  $i$  and calculate the number of correct samples  $C_i$ . We then calculate the pass@k scores at each  $k \leq N$  of interest according to:

$$\text{pass@k} = \frac{1}{\# \text{ of problems}} \sum_{i=1}^{\# \text{ of problems}} \left( 1 - \frac{\binom{N-C_i}{k}}{\binom{N}{k}} \right) \quad (1)$$

We use the numerically stable implementation of the above formula suggested in Chen et al. [15]. Results and code will be available at [https://scalyresearch.stanford.edu/pubs/language\\_monkeys/](https://scalyresearch.stanford.edu/pubs/language_monkeys/).

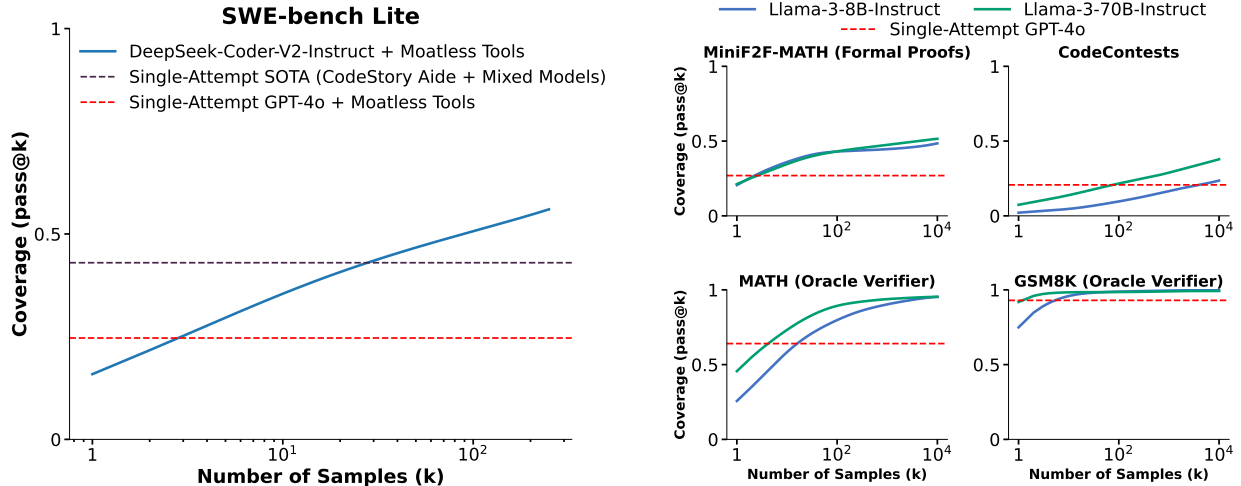


Figure 2: Across five tasks, we find that coverage (the fraction of problems solved by at least one generated sample) increases as we scale the number of samples. Notably, using repeated sampling, we are able to increase the solve rate of an open-source method from 15.9% to 56% on SWE-bench Lite.

## 2.1 Repeated Sampling is Effective Across Tasks

Here, we establish that repeated sampling improves coverage across multiple tasks and a range of sample budgets. We evaluate Llama-3-8B-Instruct and Llama-3-70B-Instruct on CodeContests, MiniF2F, GSM8K, and MATH, generating 10,000 independent samples per problem. For SWE-bench Lite, we use DeepSeek-V2-Coder-Instruct [19], as the required context length of this task exceeds the limits of the Llama-3 models. As is standard when solving SWE-bench issues, we equip our LLM with a software framework that provides the model with tools for navigating through and editing codebases. In our work, we use the open-source Moatless Tools library [62]. Note that solving a SWE-bench issue involves a back-and-forth exchange between the LLM and Moatless Tools. One sample/attempt for this benchmark refers to one entire multi-turn trajectory. To minimize costs, we restrict the number of attempts per issue to 250, with all attempts made independently of one another.

We report our results in Figure 2. We also include the single-attempt performance of GPT-4o on each task, as well the single-attempt state-of-the-art for SWE-bench Lite (CodeStory Aide [1] which uses a combination of GPT-4o and Claude 3.5 Sonnet). Across all five tasks, we find that coverage smoothly improves as the sample budget increases. When all LLMs are given a single attempt, GPT-4o outperforms the Llama and DeepSeek models at every task. However, as the number of samples increases, all three of the weaker models exceed GPT-4o’s single-attempt performance. In the case of SWE-bench Lite, we solve 56% of problems, exceeding the single-attempt SOTA of 43%.

## 2.2 Repeated Sampling is Effective Across Model Sizes and Families

The results from Section 2.1 indicate that repeated sampling improves coverage. However, we only show this trend for three recent, instruction-tuned models with 8B or more parameters. We now show that these trends hold across other model sizes, families, and levels of post-training. We expand our evaluation to include a broader set of models:

- **Llama 3:** Llama-3-8B, Llama-3-8B-Instruct, Llama-3-70B-Instruct.
- **Gemma:** Gemma-2B, Gemma-7B [48].

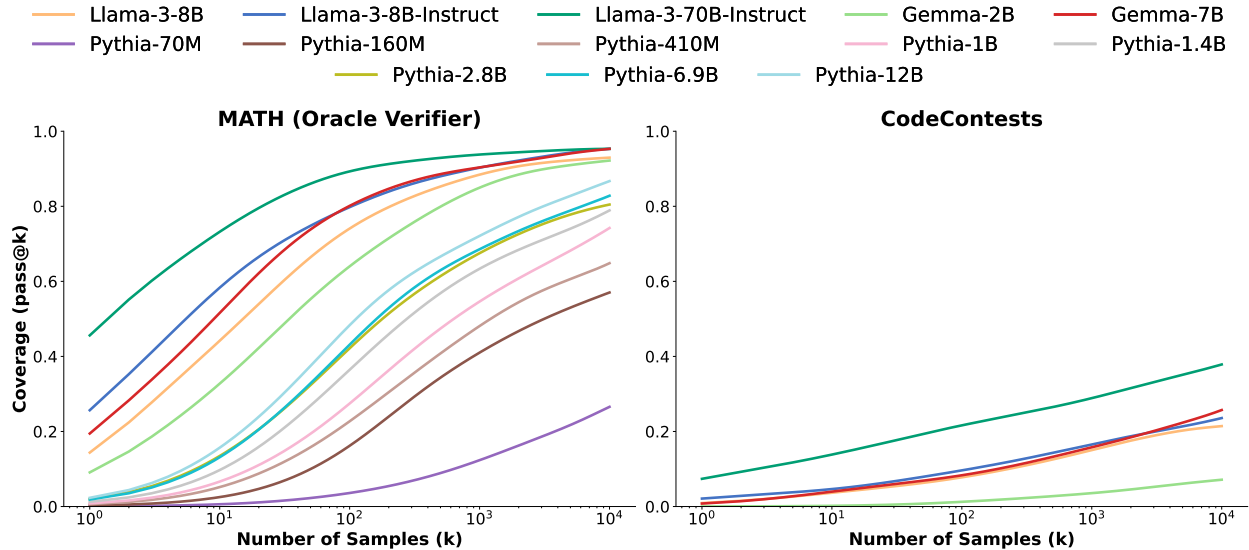


Figure 3: Scaling inference time compute via repeated sampling leads to consistent coverage gains across a variety of model sizes (70M-70B), families (Llama, Gemma and Pythia) and levels of post-training (Base and Instruct models).

- **Pythia:** Pythia-70M through Pythia-12B (eight models in total) [9].

We restrict evaluation to the MATH and CodeContests datasets to minimize inference costs, reporting results in Figure 3. Coverage increases across almost every model we test, with smaller models showing some of the sharpest increases in coverage when repeated sampling is applied. On CodeContests, the coverage of Gemma-2B increases by over 300x, from a pass@1 of 0.02% to a pass@10k of 7.1%. Similarly, when solving MATH problems with Pythia-160M, coverage increases from a pass@1 of 0.27% to a pass@10k of 57%.

The exception to this pattern of increasing coverage across models is with the Pythia family evaluated on CodeContests. All Pythia models achieve zero coverage on this dataset, even with a budget of 10,000 samples. We speculate that this is due to Pythia being trained on less coding-specific data than Llama and Gemma.

### 2.3 Repeated Sampling Can Help Balance Performance and Cost

One takeaway from the results in Sections 2.1 and 2.2 is that repeated sampling makes it possible to amplify a weaker model’s capabilities and outperform single samples from stronger models. Here, we demonstrate that this amplification can be more cost-effective than using a stronger, more expensive model, providing practitioners with a new degree of freedom when trying to jointly optimize performance and costs.

We first consider FLOPs as a cost metric, examining the Llama-3 results from Section 2.1. We re-plot our results from Figure 2, now visualizing coverage as a function of total inference FLOPs instead of the sample budget. Since Llama-3 models are dense transformers where the majority of parameters are used in matrix multiplications, we approximate inference FLOPs with the formula:

$$\begin{aligned} \text{FLOPs per token} &\approx 2 * (\text{num parameters} + 2 * \text{num layers} * \text{token dim} * \text{context length}) \\ \text{total inference FLOPs} &\approx \text{num prompt tokens} * \text{FLOPs per token} \\ &\quad + \text{num decoded tokens} * \text{FLOPs per token} * \text{num completions} \end{aligned}$$

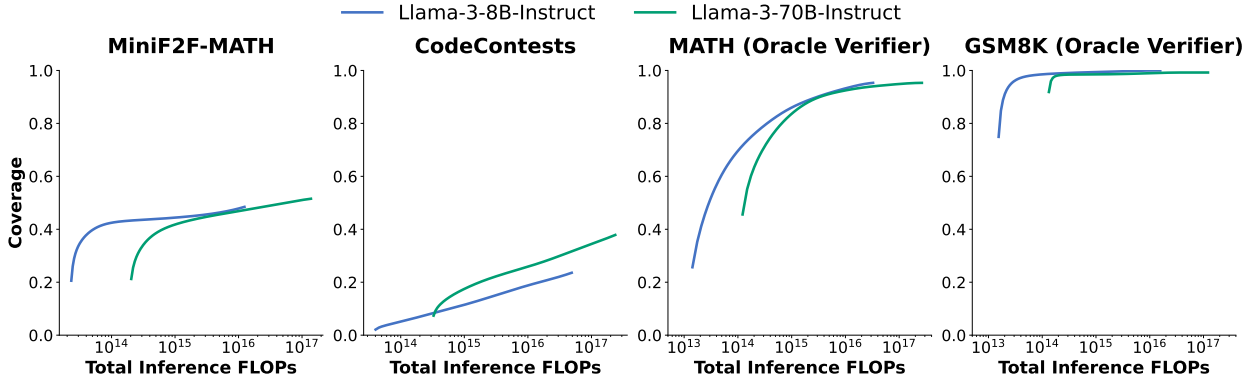


Figure 4: Comparing cost, measured in number of inference FLOPs, and coverage for Llama-3-8B-Instruct and Llama-3-70B-Instruct. We see that the ideal model size depends on the task, compute budget, and coverage requirements. Note that Llama-3-70B-Instruct does not achieve 100% coverage on GSM8K due to an incorrectly labelled ground truth answer: see Appendix E.

Model	Cost per attempt (USD)	Number of attempts	Issues solved (%)	Total Cost (USD)	Relative Total Cost
DeepSeek-V2-Coder-Instruct	0.008	5	29.62	12	1x
GPT-4o	0.13	1	24.00	39	3.25x
Claude 3.5 Sonnet	0.17	1	26.70	51	4.25x

Table 1: Comparing API cost (in US dollars) and performance for various models on the SWE-bench Lite dataset using the Moatless Tools agent framework. When sampled more, the open-source DeepSeekCoder-V2 model can achieve the same issue solve-rate as closed-source frontier models for under a third of the price.

We present our re-scaled results for MiniF2F, CodeContests, MATH, and GSM8K in Figure 4. Interestingly, the model that maximizes coverage varies with the compute budget and task. On MiniF2F, GSM8K and MATH, Llama-3-8B-Instruct always obtains higher coverage than the larger (and more expensive) 70B model when the FLOP budget is fixed. However for CodeContests, the 70B model is almost always more cost effective. We note that examining FLOPs alone can be a crude cost metric that ignores other aspects of system efficiency [20]. In particular, repeated sampling can make use of high batch sizes and specialized optimizations that improve system throughput relative to single-attempt inference workloads [32, 6, 61]. We discuss this in more detail in Section 5.

We also examine the dollar costs of repeated sampling when solving SWE-bench Lite issues using current API pricing. Keeping the agent framework (Moatless Tools) constant, we consider making a single attempt per issue with Claude 3.5 Sonnet and GPT-4o, as well as repeated sampling using DeepSeek-V2-Coder-Instruct. We report the average cost per issue and issue resolution rate with each approach in Table 1. While the DeepSeek model is weaker than the GPT and Claude models, it is also over 10x cheaper. In this case, repeated sampling provides a cheaper alternative to paying a premium for access to strong models while achieving a superior issue solve rate.

### 3 Characterizing the Benefits of Repeated Sampling

The relationship between an LLM’s loss and its training compute has been well-characterized with training scaling laws [25, 33, 26]. These laws have empirically held over many orders of magnitude and inspire confidence in model developers that large investments in training will pay off. Inspired

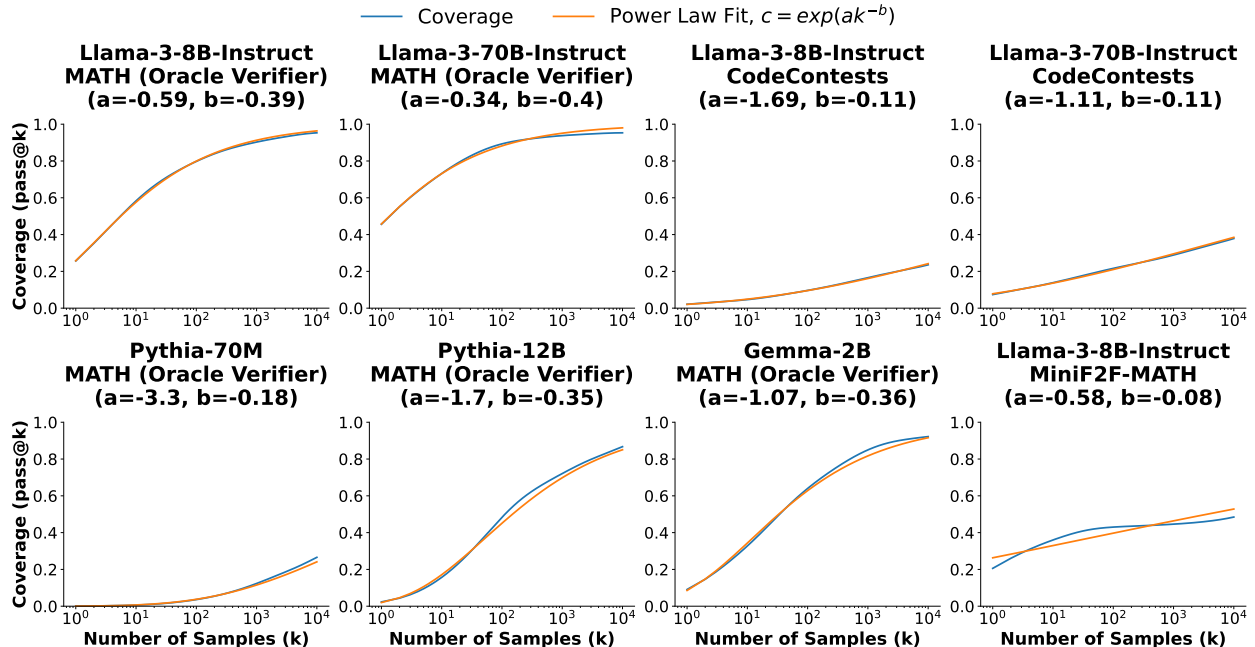


Figure 5: The relationship between coverage and the number of samples can be modelled with an exponentiated power law for most tasks and models. We highlight that some curves, such as Llama-3-8B-Instruct on MiniF2F-MATH, do not follow this trend closely.

by training scaling laws, here we aim to better characterize the relationship between coverage and the sample budget (i.e. the amount of inference compute), presenting two interesting observations:

1. The relationship between coverage and the number of samples can often be modelled with an exponentiated power law.
2. For a given task, the coverage curves of different models from the same family resemble S-curves with similar slopes but distinct horizontal offsets.

### 3.1 Scaling Laws for Repeated Sampling

Here, we develop an explicit model for the relationship between coverage and the number of samples. The GPT-4 technical report [41] finds that the relationship between a model’s mean-log-pass-rate on coding problems and its training compute can be modelled well using a power law. We start by adopting the same function class, but now modelling the log of coverage  $c$  as a function of the number of samples  $k$ :

$$\log(c) \approx ak^{-b} \quad (2)$$

where  $a, b \in \mathbb{R}$  are fitted model parameters. In order to directly predict coverage, we exponentiate both sides, ending up with the final model of:

$$c \approx \exp(ak^{-b}) \quad (3)$$

We provide examples of fitted coverage curves in Figure 5, and additional curves in Appendix C.2. While these laws are not as exact as training scaling laws (most strikingly on MiniF2F-MATH), they provide encouraging early evidence that the benefits of inference scaling can be characterized.



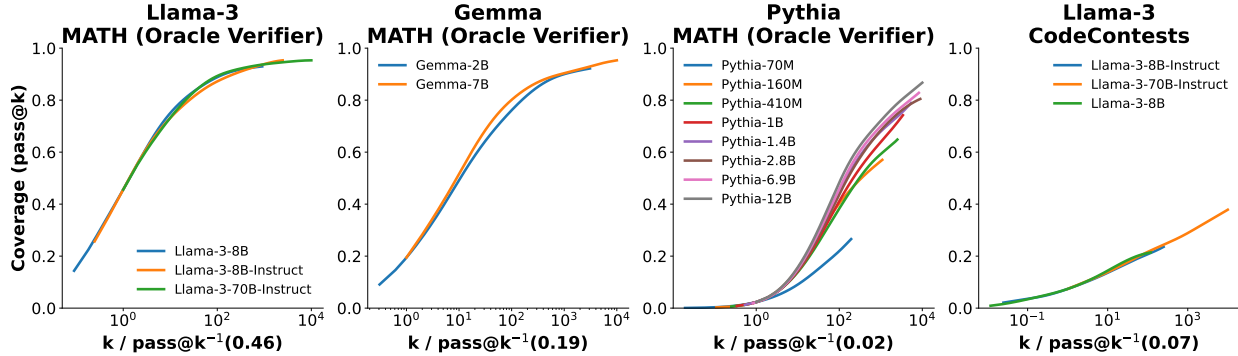


Figure 6: Overlaying the coverage curves from different models belonging to the same family. We perform this overlay by horizontally shifting every curve (with a logarithmic x-axis) so that all curves pass through the point  $(1, c)$ . We pick  $c$  to be the maximum  $\text{pass}@1$  score over all models in the plot. We note that the similarity of the curves post-shifting shows that, within a model family, sampling scaling curves follow a similar shape.

### 3.2 Similarities in Coverage Curves Across Models

Interestingly, when comparing the coverage curves (with a logarithmic x-axis) of different models from the same family on the same task (see Figure 3), it appears that the traced S-curves have the same slope, but unique horizontal offsets. To investigate this further, we overlay the coverage curves of different models from the same family in Figure 6. We do this by picking an anchor coverage value  $c$ , and shifting every curve leftward (in log-space) so that each passes through the point  $(1, c)$ . This corresponds to a leftward shift by  $\log(\text{pass}@k^{-1}(c))$ , where  $\text{pass}@k^{-1}(c)$  denotes the closest natural number  $k$  such that  $\text{pass}@k = c$ . We pick  $c$  to be the maximum  $\text{pass}@1$  score over all models from the same family. These similarities demonstrate that across models from the same family, the increase in the log-sample-budget (or equivalently, the multiplicative increase in the sample budget) needed to improve coverage from  $c$  to  $c'$  is approximately constant.

## 4 Harnessing Repeated Sampling Requires Precision

So far, we have focused on measuring model coverage, characterizing the benefits of repeated sampling under the best-case scenario where we can always identify correct model samples. We now turn to the complementary problem of precision: given a collection of model samples, can we identify the correct ones? In Section 4.1, we evaluate two common verification methods (majority voting and reward model scoring) on GSM8K and MATH. Additionally, in Section 4.2, we discuss potential pitfalls when relying on unit tests to identify correct software programs.

### 4.1 Common Verification Methods Don't Always Scale with the Sample Budget

Of the five tasks we evaluate, only GSM8K and MATH lack tools for automatically verifying solutions. Here, we evaluate two common approaches to deciding on a final answer: calculating a majority vote across samples and using a reward model to assign a score to each sample. We test these techniques on their ability to identify correct solutions from the 10,000 samples we generated with Llama-3-8B-Instruct and Llama-3-70B-Instruct in Section 2. We benchmark three methods:

1. **Majority Vote:** We pick the most common final answer [55].

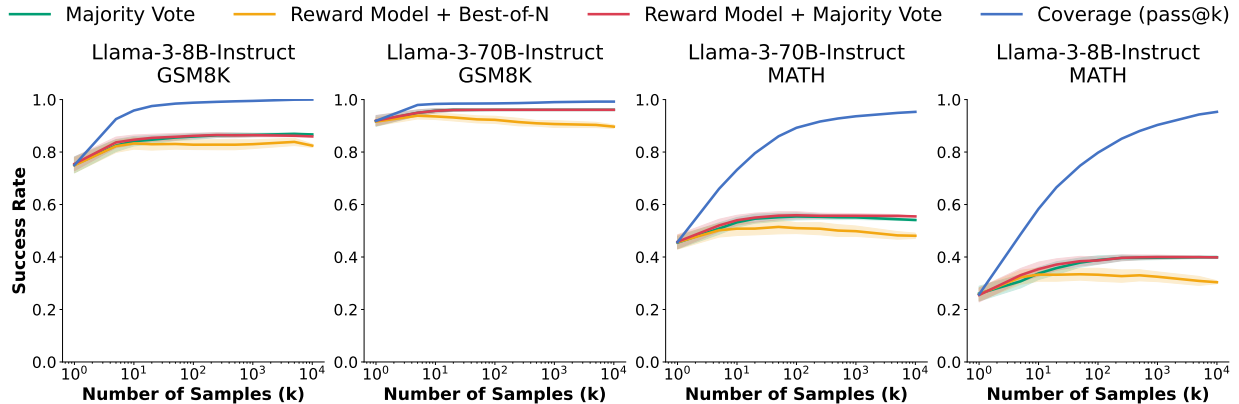


Figure 7: Comparing coverage (performance with an oracle verifier) to mainstream methods available for picking the correct answer (majority voting, reward model selection and reward model majority voting) as we increase the number of samples. Although near-perfect coverage is achieved, all sample selection methods fail to reach the coverage upper bound and saturate before reaching 100 samples. For every  $k$  value, we calculate the metric on 100 subsets of size  $k$  then plot the mean and one standard deviation across subsets.

2. **Reward Model + Best-of-N:** We use a reward model [17] to score each solution, and pick the answer from the highest-scoring sample.
3. **Reward Model + Majority Vote:** We calculate a majority vote where each sample is weighted by its reward model score.

We use ArmoRM-Llama3-8B-v0.1 [53] as a reward model, which currently has the highest reasoning score on the RewardBench leaderboard [35] among open-weight models. We report our results in Figure 7 as we increase the number of samples. While success rate initially increases with the number of samples for all three methods, it plateaus around 100 samples. Meanwhile, coverage continues to increase with the number of samples and exceeds 95%.

In the case of majority voting, this success rate saturation is easily explainable. As the number of samples increases, the proportion of votes allocated to each answer stabilizes, and therefore the success rate plateaus. For some GSM8K and MATH problems, correct solutions are sampled with a probability of 1% or lower (see Figure 8), making them a minority of samples. As the number of samples increases, rare correct solutions will appear for more problems, increasing coverage but not the success rate with majority voting. In order to fully benefit from repeated sampling, sample identification methods must be able to solve these “needle-in-a-haystack” cases and identify rare, correct samples.

Given the poor performance of the reward model, it is reasonable to wonder how “hard” it is to verify a candidate solution. With GSM8K and MATH, only a sample’s final answer is used for assessing correctness, with the intermediate chains of thought being excluded. If models generated only non-sensical chains of thought before guessing a correct final answer, verification may not be any easier than solving the problem in the first place. We investigate this question by manually evaluating 105 chains of thought from correct Llama-3-8B-Instruct solutions to GSM8K problems, reporting our results in Table 2. We find that over 90% of the chains of thought that we graded are faithful, even among problems where correct answers are generated infrequently. These correct reasoning steps indicate that there is signal for a verifier to exploit when identifying correct samples. Interestingly, during this process we also identified one GSM8K problem that has an incorrect ground truth answer (see Appendix E). This incorrect GSM8K problem is also the only one that Llama-3-70B-Instruct did not generate a “correct” sample for across 10,000 attempts.

Pass@1	# Problems	# CoT Graded	Correct CoT	Incorrect CoT	Incorrect Ground Truth
0-10%	5	15	11	1	1 problem, 3 CoTs
10-25%	10	30	27	3	0 problems
25-75%	29	30	28	2	0 problems
75-100%	84	30	30	0	0 problems

Table 2: Human evaluation of the validity of the Chain-of-Thought reasoning in Llama-3-8B-Instruct answers to GSM8K problems. 3 chains of thought were graded per problem. Even for difficult questions, where the model only gets  $\leq 10\%$  of samples correct, the CoTs almost always follow valid logical steps. For the model generations and human labels, see here.

## 4.2 Verifiers and Software Tasks: Two Cautionary Tales

Software development tasks can occupy a middle-ground with respect to available verification tools. On one hand, the ability to execute and test code allows for a higher degree of automatic verification than is possible with unstructured language tasks. However, tools like unit tests take a black-box approach to verifying a piece of code and are not as comprehensive as methods like proof checkers. These imperfections in the verification process can lead to false positives and/or false negatives that are important to consider when applying repeated sampling. Below we provide two examples of software verifier imperfections that we encountered when generating our results from Section 2.1.

### 4.2.1 Flaky Tests in SWE-bench Lite

When producing our results on SWE-bench Lite, we identified that 11.3% of problems have flaky test suites that do not produce consistent results when running them on the same candidate solution. These flaky tests occasionally classify even the dataset’s ground-truth issue solutions as incorrect. Additionally, the test suites for some issues can be non-deterministic depending on the candidate solution. For example, two SWE-bench Lite issues involve manipulating Python sets, which are naturally unordered. The gold solutions for these issues explicitly order the items in the set and pass the test suites reliably. However, some model-generated candidate solutions do not impose such an ordering, and therefore pass the tests on some “lucky” runs and not others. In Appendix B, we list all of the problem IDs where we identified flaky tests. We also report our SWE-bench Lite results from Figure 2 with the problematic issues removed, finding similar results to our evaluations on the whole dataset.

### 4.2.2 False Negatives in CodeContests

Each problem from the CodeContests dataset comes with a set of input-output test cases used to assess the correctness of solutions. These test cases are more comprehensive than those from earlier coding benchmarks like APPS [23], cutting down on the frequency of false positive solutions that pass all test cases but do not fully solve the described problem. However, the construction of the CodeContests test suites leads to false negative solutions that are correct but fail the tests.

For some CodeContests problems, the problem description allows for multiple distinct correct outputs for a given test input. However, the corresponding test cases do not handle these scenarios, instead requiring that one particular correct output is emitted. Additionally, many CodeContests test cases have been programmatically generated by mutating original test cases from the problem. Some mutated inputs violate the problem’s input specifications (e.g. a mutated input being zero when the description promises a positive integer). These malformed test cases can lead to inconsistent behaviour between different correct solutions.

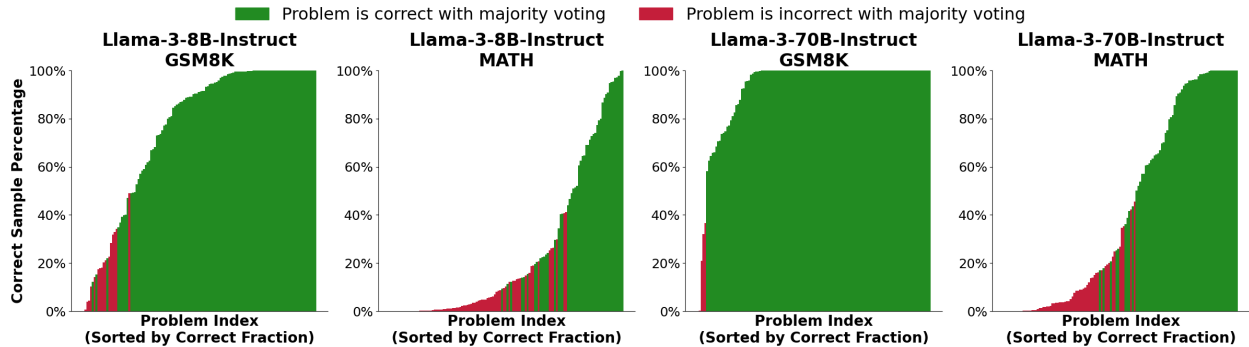


Figure 8: Bar charts showing the fraction of samples (out of 10,000 samples) that are correct, for each problem in the subsets of GSM8K and MATH we evaluate on. There is one bar per problem, and the height of the bar corresponds to the fraction of samples that arrive at the correct answer. Bars are green if self-consistency picked the correct answer and are red otherwise. We highlight that there are many problems with correct solutions, where the correct solutions are sampled infrequently.

We assess the prevalence of these issues by running each problem’s test suite on the list of correct solutions that CodeContests provides. Of the 122 problems in the test set that have Python3 solutions, we find that 35 problems have “correct” solutions that fail the corresponding tests. Since we do not allow models to view all of a problem’s test cases (and their peculiarities), applying repeated sampling to these problems contains an element of “rolling the dice” to generate a solution that is not only correct, but emits the particular outputs that pass the tests.

## 5 Discussion and Limitations

In this work, we explore repeated sampling as an axis for scaling compute at inference time in order to improve model performance. Across a range of models and tasks, repeated sampling can significantly improve the fraction of problems solved using any generated sample (i.e. coverage). When correct solutions can be identified (either with automatic verification tools or other verification algorithms), repeated sampling can amplify model capabilities during inference. This amplification can make the combination of a weaker model and many samples more performant and cost-effective than using fewer attempts from a stronger, more expensive model.

**Improving Repeated Sampling:** In our experiments, we explore only a simple version of repeated sampling where all attempts to a problem are generated independently of one another using the exact same prompt and hyperparameters. We believe that this setup can be refined to improve performance, particularly along the following directions:

1. **Solution Diversity:** We currently rely on a positive sampling temperature as the sole mechanism for creating diversity among samples. Combining this token-level sampling with other, higher-level approaches may be able to further increase diversity. For example, AlphaCode conditions different samples with different metadata tags.
2. **Multi-Turn Interactions:** Despite automatic verification tools being available when solving CodeContests and MiniF2F problems, we use only a single-turn setup where models generate a solution without any ability to iterate on it. Providing models with execution feedback from these tools should improve solution quality. We are interested in the tradeoffs associated with

multi-turn interactions, since each attempt becomes more expensive, but also may be more likely to succeed.

3. **Learning From Previous Attempts:** Currently, our experiments fully isolate attempts from each other. Access to existing samples, particularly if verification tools can provide feedback on them, may be helpful when generating future attempts.

**Repeated Sampling and Inference Systems:** Repeated sampling is a distinct LLM inference workload from serving chatbot requests. Production chatbot deployments place an emphasis on low response latencies, and adhering to latency targets can force a lower per-device batch size and reduce hardware utilization. In contrast, when sampling many completions to a single prompt, a larger emphasis can be placed on overall throughput and maximizing hardware utilization. Additionally, repeated sampling can benefit from specialized attention optimizations that exploit overlaps in prompts across sequences [32, 6, 61]. Repeated sampling inference can therefore be accomplished at a lower cost than naively making many parallel requests to a chatbot-oriented API. These cost savings can further motivate choosing to sample many times from a cheaper model instead of fewer times from a more expensive one.

**Verifiers:** Our results from Section 4 highlight the importance of improving sample verification methods when tools for automatically doing so are unavailable. Equipping models with the ability to assess their own outputs will allow repeated sampling to be scaled to far more tasks. Of particular interest is applying repeated sampling to unstructured tasks like creative writing, which can require a more subjective comparison between different samples than the pass-fail tasks we consider. An alternative direction to developing model-based verifiers is to design converters that can make an unstructured task verifiable, for example by formalizing an informal math statement into a language like Lean so that proof checkers can be applied.

## 6 Related Work

**Scaling Inference Compute:** Methods that perform additional computation during inference have been successful across many areas of deep learning. Across a variety of game environments, state-of-the-art methods leverage inference-time search that examines many possible future game states before deciding on a move [12, 45, 10]. Similar tree-based methods can also be effective in combination with LLMs, allowing models to better plan and explore different approaches [58, 8, 49, 50]. Another axis for increasing LLM inference compute allows models to spend tokens deliberating on a problem before coming to a solution [57, 56, 59]. Additionally, multiple models can be ensembled together at inference time to combine their strengths [54, 14, 40, 52, 29]. Yet another approach involves using LLMs to critique and refine their own responses [39, 7].

**Repeated Sampling:** Previous work has demonstrated that repeated sampling can improve LLM capabilities in multiple domains. One of the most effective use cases is coding [43, 15, 34], where performance continues to scale up to a million samples and verification tools (e.g. unit tests) are often available to automatically score every candidate solution. Recently, Greenblatt [22] shows that repeated sampling is effective when solving puzzles from the ARC challenge [16], observing log-linear scaling as the number of samples increases. In chat applications, repeated sampling combined with best-of-N ranking with a reward model can outperform greedily sampling a single response [28]. In domains without automatic verification tools, existing work shows that using majority voting [55] or

a trained model-based verifier [18, 38, 27] to decide on a final answer can improve performance on reasoning tasks relative to taking a single sample. Concurrent with our work, Song et al. [46] finds that using the best available sample improves LLM performance on chat, math, and code tasks, sweeping up to a max of 128 samples.

**Scaling Laws:** Characterizing how scaling affects model performance can lead to more informed decisions on how to allocate resources. Scaling laws for LLM training find a power law relationship between loss and the amount of training compute and provide estimates for the optimal model and dataset size given a fixed compute budget [25, 33, 26]. Jones [31] finds scaling laws in the context of the board game Hex, observing that performance scales predictably with model size and the difficulty of the problem. Interestingly, they also show that performance scales with the amount of test-time compute spent while performing tree search. Recently, Shao et al. [44] observe scaling laws when augmenting LLMs with external retrieval datasets, finding that performance on retrieval tasks scales smoothly with the size of the retrieval corpus.

## 7 Acknowledgements

We thank Together AI for partially sponsoring the compute for this project, as well as Rahul Chalamala and Ben Athiwaratkun for their help managing this infrastructure. We thank John Yang for his advice and support when running our SWE-bench experiments. Finally, we are grateful to Mayee Chen, Neel Guha, Quinn McIntyre, Jon Saad-Falcon, and Benjamin Spector for their helpful discussions and feedback throughout this project.

We gratefully acknowledge the support of NIH under No. U54EB020405 (Mobilize), NSF under Nos. CCF2247015 (Hardware-Aware), CCF1763315 (Beyond Sparsity), CCF1563078 (Volume to Velocity), and 1937301 (RTML); US DEVCOM ARL under Nos. W911NF-23-2-0184 (Long-context) and W911NF-21-2-0251 (Interactive Human-AI Teaming); ONR under Nos. N000142312633 (Deep Signal Processing); Stanford HAI under No. 247183; NXP, Xilinx, LETI-CEA, Intel, IBM, Microsoft, NEC, Toshiba, TSMC, ARM, Hitachi, BASF, Accenture, Ericsson, Qualcomm, Analog Devices, Google Cloud, Salesforce, Total, the HAI-GCP Cloud Credits for Research program, the Stanford Data Science Initiative (SDSI), and members of the Stanford DAWN project: Meta, Google, and VMWare. The U.S. Government is authorized to reproduce and distribute reprints for Governmental purposes notwithstanding any copyright notation thereon. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views, policies, or endorsements, either expressed or implied, of NIH, ONR, or the U.S. Government.

This work was completed with the support of the Clarendon Fund Scholarships.

## References

- [1] Aide.dev, 2024. URL <https://aide.dev/>.
- [2] Hello gpt-4o, 2024. URL <https://openai.com/index/hello-gpt-4o/>.
- [3] Meta llama 3, 2024. URL <https://llama.meta.com/llama3/>.
- [4] Claude 3.5 sonnet, 2024. URL <https://www.anthropic.com/news/claude-3-5-sonnet>.
- [5] Voyage ai, 2024. URL <https://www.voyageai.com/>.
- [6] Ben Athiwaratkun, Sujan Kumar Gonugondla, Sanjay Krishna Gouda, Haifeng Qian, Hantian Ding, Qing Sun, Jun Wang, Jiacheng Guo, Liangfu Chen, Parminder Bhatia, Ramesh Nallapati, Sudipta Sengupta, and Bing Xiang. Bifurcated attention: Accelerating massively parallel decoding with shared prefixes in llms, 2024. URL <https://arxiv.org/abs/2403.08845>.
- [7] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Olsson, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse, Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mercado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Conerly, Tom Henighan, Tristan Hume, Samuel R. Bowman, Zac Hatfield-Dodds, Ben Mann, Dario Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and Jared Kaplan. Constitutional ai: Harmlessness from ai feedback, 2022.
- [8] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, and Torsten Hoeffler. Graph of thoughts: Solving elaborate problems with large language models. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(16):17682–17690, March 2024. ISSN 2159-5399. doi: 10.1609/aaai.v38i16.29720. URL <http://dx.doi.org/10.1609/aaai.v38i16.29720>.
- [9] Stella Biderman, Hailey Schoelkopf, Quentin Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar van der Wal. Pythia: A suite for analyzing large language models across training and scaling, 2023. URL <https://arxiv.org/abs/2304.01373>.
- [10] Noam Brown, Anton Bakhtin, Adam Lerer, and Qucheng Gong. Combining deep reinforcement learning and search for imperfect-information games. In *Proceedings of the 34th International Conference on Neural Information Processing Systems*, NIPS ’20, Red Hook, NY, USA, 2020. Curran Associates Inc. ISBN 9781713829546.
- [11] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020. URL <https://arxiv.org/abs/2005.14165>.

- [12] Murray Campbell, A. Joseph Hoane, and Feng-hsiung Hsu. Deep blue. *Artif. Intell.*, 134 (1–2):57–83, jan 2002. ISSN 0004-3702. doi: 10.1016/S0004-3702(01)00129-1. URL [https://doi.org/10.1016/S0004-3702\(01\)00129-1](https://doi.org/10.1016/S0004-3702(01)00129-1).
- [13] Guoxin Chen, Minpeng Liao, Chengxi Li, and Kai Fan. Alphamath almost zero: process supervision without process, 2024.
- [14] Lingjiao Chen, Jared Quincy Davis, Boris Hanin, Peter Bailis, Ion Stoica, Matei Zaharia, and James Zou. Are more llm calls all you need? towards scaling laws of compound inference systems, 2024. URL <https://arxiv.org/abs/2403.02419>.
- [15] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code, 2021. URL <https://arxiv.org/abs/2107.03374>.
- [16] François Chollet. On the measure of intelligence, 2019. URL <https://arxiv.org/abs/1911.01547>.
- [17] Paul Christiano, Jan Leike, Tom B. Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences, 2017. URL <https://arxiv.org/abs/1706.03741>.
- [18] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems, 2021.
- [19] DeepSeek-AI et al. Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model, 2024. URL <https://arxiv.org/abs/2405.04434>.
- [20] Mostafa Dehghani, Anurag Arnab, Lucas Beyer, Ashish Vaswani, and Yi Tay. The efficiency misnomer, 2022. URL <https://arxiv.org/abs/2110.12894>.
- [21] Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.
- [22] Ryan Greenblatt. Getting 50 <https://www.lesswrong.com/posts/Rdwui3wHxCeKb7feK/getting-50-sota-on-arc-agi-with-gpt-4o>, 2024.



- [23] Dan Hendrycks, Steven Basart, Saurav Kadavath, Mantas Mazeika, Akul Arora, Ethan Guo, Collin Burns, Samir Puranik, Horace He, Dawn Song, and Jacob Steinhardt. Measuring coding challenge competence with apps, 2021.
- [24] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset, 2021.
- [25] Joel Hestness, Sharan Narang, Newsha Ardalani, Gregory Diamos, Heewoo Jun, Hassan Kianinejad, Md. Mostofa Ali Patwary, Yang Yang, and Yanqi Zhou. Deep learning scaling is predictable, empirically, 2017. URL <https://arxiv.org/abs/1712.00409>.
- [26] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. Training compute-optimal large language models, 2022. URL <https://arxiv.org/abs/2203.15556>.
- [27] Arian Hosseini, Xingdi Yuan, Nikolay Malkin, Aaron Courville, Alessandro Sordoni, and Rishabh Agarwal. V-star: Training verifiers for self-taught reasoners, 2024.
- [28] Robert Irvine, Douglas Boubert, Vyas Raina, Adian Liusie, Ziyi Zhu, Vineet Mudupalli, Aliaksei Korshuk, Zongyi Liu, Fritz Cremer, Valentin Assassi, Christie-Carol Beauchamp, Xiaoding Lu, Thomas Rialan, and William Beauchamp. Rewarding chatbots for real-world engagement with millions of users, 2023. URL <https://arxiv.org/abs/2303.06135>.
- [29] Dongfu Jiang, Xiang Ren, and Bill Yuchen Lin. Llm-blender: Ensembling large language models with pairwise ranking and generative fusion, 2023. URL <https://arxiv.org/abs/2306.02561>.
- [30] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues?, 2024. URL <https://arxiv.org/abs/2310.06770>.
- [31] Andy L. Jones. Scaling scaling laws with board games, 2021. URL <https://arxiv.org/abs/2104.03113>.
- [32] Jordan Juravsky, Bradley Brown, Ryan Ehrlich, Daniel Y Fu, Christopher Ré, and Azalia Mirhoseini. Hydragen: High-throughput llm inference with shared prefixes. *arXiv preprint arXiv:2402.05099*, 2024.
- [33] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020.
- [34] Sumith Kulal, Panupong Pasupat, Kartik Chandra, Mina Lee, Oded Padon, Alex Aiken, and Percy Liang. Spoc: Search-based pseudocode to code, 2019. URL <https://arxiv.org/abs/1906.04908>.
- [35] Nathan Lambert, Valentina Pyatkin, Jacob Morrison, LJ Miranda, Bill Yuchen Lin, Khyathi Chandu, Nouha Dziri, Sachin Kumar, Tom Zick, Yejin Choi, Noah A. Smith, and Hannaneh Hajishirzi. Rewardbench: Evaluating reward models for language modeling, 2024. URL <https://arxiv.org/abs/2403.13787>.

- [36] Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with language models, 2022. URL <https://arxiv.org/abs/2206.14858>.
- [37] Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, Thomas Hubert, Peter Choy, Cyprien de Masson d’Autume, Igor Babuschkin, Xinyun Chen, Po-Sen Huang, Johannes Welbl, Sven Gowal, Alexey Cherepanov, James Molloy, Daniel J. Mankowitz, Esme Sutherland Robson, Pushmeet Kohli, Nando de Freitas, Koray Kavukcuoglu, and Oriol Vinyals. Competition-level code generation with alphacode. *Science*, 378(6624):1092–1097, December 2022. ISSN 1095-9203. doi: 10.1126/science.abq1158. URL <http://dx.doi.org/10.1126/science.abq1158>.
- [38] Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step, 2023.
- [39] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhunoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. Self-refine: Iterative refinement with self-feedback, 2023. URL <https://arxiv.org/abs/2303.17651>.
- [40] Isaac Ong, Amjad Almahairi, Vincent Wu, Wei-Lin Chiang, Tianhao Wu, Joseph E. Gonzalez, M Waleed Kadous, and Ion Stoica. Routellm: Learning to route llms with preference data, 2024. URL <https://arxiv.org/abs/2406.18665>.
- [41] OpenAI et al. Gpt-4 technical report, 2024. URL <https://arxiv.org/abs/2303.08774>.
- [42] Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- [43] Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Romain Sauvestre, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. Code llama: Open foundation models for code, 2023. URL <https://arxiv.org/abs/2308.12950>.
- [44] Rulin Shao, Jacqueline He, Akari Asai, Weijia Shi, Tim Dettmers, Sewon Min, Luke Zettlemoyer, and Pang Wei Koh. Scaling retrieval-based language models with a trillion-token datastore, 2024. URL <https://arxiv.org/abs/2407.12854>.
- [45] David Silver, Thomas Hubert, Julian Schrittwieser, Ioannis Antonoglou, Matthew Lai, Arthur Guez, Marc Lanctot, Laurent Sifre, Dhharshan Kumaran, Thore Graepel, Timothy Lillicrap, Karen Simonyan, and Demis Hassabis. Mastering chess and shogi by self-play with a general reinforcement learning algorithm, 2017.
- [46] Yifan Song, Guoyin Wang, Sujian Li, and Bill Yuchen Lin. The good, the bad, and the greedy: Evaluation of llms should not ignore non-determinism, 2024. URL <https://arxiv.org/abs/2407.10457>.
- [47] Gemini Team et al. Gemini: A family of highly capable multimodal models, 2024. URL <https://arxiv.org/abs/2312.11805>.

- [48] Gemma Team et al. Gemma: Open models based on gemini research and technology, 2024. URL <https://arxiv.org/abs/2403.08295>.
- [49] Ye Tian, Baolin Peng, Linfeng Song, Lifeng Jin, Dian Yu, Haitao Mi, and Dong Yu. Toward self-improvement of llms via imagination, searching, and criticizing, 2024. URL <https://arxiv.org/abs/2404.12253>.
- [50] Trieu H. Trinh, Yuhuai Wu, Quoc V. Le, He He, and Thang Luong. Solving olympiad geometry without human demonstrations. *Nature*, 625(7995):476–482, 2024. ISSN 1476-4687. doi: 10.1038/s41586-023-06747-5. URL <https://doi.org/10.1038/s41586-023-06747-5>.
- [51] Pauli Virtanen, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, Pearu Peterson, Warren Weckesser, Jonathan Bright, Stéfan J. van der Walt, Matthew Brett, Joshua Wilson, K. Jarrod Millman, Nikolay Mayorov, Andrew R. J. Nelson, Eric Jones, Robert Kern, Eric Larson, C J Carey, İlhan Polat, Yu Feng, Eric W. Moore, Jake VanderPlas, Denis Laxalde, Josef Perktold, Robert Cimrman, Ian Henriksen, E. A. Quintero, Charles R. Harris, Anne M. Archibald, Antônio H. Ribeiro, Fabian Pedregosa, Paul van Mulbregt, and SciPy 1.0 Contributors. SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods*, 17:261–272, 2020. doi: 10.1038/s41592-019-0686-2.
- [52] Fanqi Wan, Xinting Huang, Deng Cai, Xiaojun Quan, Wei Bi, and Shuming Shi. Knowledge fusion of large language models, 2024. URL <https://arxiv.org/abs/2401.10491>.
- [53] Haoxiang Wang, Wei Xiong, Tengyang Xie, Han Zhao, and Tong Zhang. Interpretable preferences via multi-objective reward modeling and mixture-of-experts, 2024. URL <https://arxiv.org/abs/2406.12845>.
- [54] Junlin Wang, Jue Wang, Ben Athiwaratkun, Ce Zhang, and James Zou. Mixture-of-agents enhances large language model capabilities, 2024. URL <https://arxiv.org/abs/2406.04692>.
- [55] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models, 2023.
- [56] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models, 2023.
- [57] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models, 2022. URL <https://arxiv.org/abs/2210.03629>.
- [58] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models, 2023. URL <https://arxiv.org/abs/2305.10601>.
- [59] Eric Zelikman, Georges Harik, Yijia Shao, Varuna Jayasiri, Nick Haber, and Noah D. Goodman. Quiet-star: Language models can teach themselves to think before speaking, 2024. URL <https://arxiv.org/abs/2403.09629>.
- [60] Kunhao Zheng, Jesse Michael Han, and Stanislas Polu. Minif2f: a cross-system benchmark for formal olympiad-level mathematics. *arXiv preprint arXiv:2109.00110*, 2021.

- [61] Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Chuyue Sun, Jeff Huang, Cody Hao Yu, Shiyi Cao, Christos Kozyrakis, Ion Stoica, Joseph E. Gonzalez, Clark Barrett, and Ying Sheng. Sglang: Efficient execution of structured language model programs, 2024. URL <https://arxiv.org/abs/2312.07104>.
- [62] Albert Örwall. Moatless tools. <https://github.com/aorwall/moatless-tools/tree/a1017b78e3e69e7d205b1a3faa83a7d19fce3fa6>, 2024.

# A Sampling Experimental Setup

## A.1 Lean Formal Proofs

We report results on the 130 questions in the test set of the lean4 MiniF2F dataset that correspond to formalized MATH problems. This dataset is derived from the fixed version of the original MiniF2F dataset created by Zheng et al. [60]. We sample with a temperature of 0.5 and do not use nucleus sampling. We generated 10,000 samples per problem. We use proofs of the following 5 theorems from the validation set as few-shot examples:

- `mathd_algebra_116`
- `amc12_2000_p5`
- `mathd_algebra_132`
- `mathd_algebra_11`
- `mathd_numbertheory_84`

Our prompt consists of:

1. Few shot examples.
2. Header imports present in each problem in the HuggingFace dataset `cat-searcher/minif2f-lean4` dataset, an upload of the lean4 MiniF2F dataset.
3. The theorem definition. In order to avoid leaking information about how to solve the theorem from its name, we replace the name of the theorem with `theorem_i`.  $i \in \{1, 2, 3, 4, 5\}$  for the few-shot examples and  $i = 6$  for the current problem.

We set 200 as the max token length for the generated solution. To grade solutions, we use the `lean-dojo 1.1.2` library with lean version `4.3.0-rc2`. We set a timeout of 10 seconds for every tactic step.

### Few-Shot Example

Write a lean4 proof to the provided formal statement. You have access to the standard mathlib4 library.

```
```import Mathlib.Algebra.BigOperators.Basic
import Mathlib.Data.Real.Basic
import Mathlib.Data.Complex.Basic
import Mathlib.Data.Nat.Log
import Mathlib.Data.Complex.Exponential
import Mathlib.NumberTheory.Divisors
import Mathlib.Data.ZMod.Defs
import Mathlib.Data.ZMod.Basic
import Mathlib.Topology.Basic
import Mathlib.Data.Nat.Digits

open BigOperators
open Real
open Nat
open Topology
theorem theorem1
Int.floor ((9:ℝ) / 160 * 100) = 5 :=
by (
rw [Int.floor_eq_iff]
constructor
all_goals norm_num
)```
```

### Example Prompt

Write a lean4 proof to the provided formal statement. You have access to the standard mathlib4 library.

```
```import Mathlib.Algebra.BigOperators.Basic
import Mathlib.Data.Real.Basic
import Mathlib.Data.Complex.Basic
import Mathlib.Data.Nat.Log
import Mathlib.Data.Complex.Exponential
import Mathlib.NumberTheory.Divisors
import Mathlib.Data.ZMod.Defs
import Mathlib.Data.ZMod.Basic
import Mathlib.Topology.Basic
import Mathlib.Data.Nat.Digits

open BigOperators
open Real
open Nat
open Topology
theorem theorem6
  (b h v : ℝ)
  (h0 : 0 < b ∧ 0 < h ∧ 0 < v)
  (h1 : v = 1 / 3 * (b * h))
  (h2 : b = 30)
  (h3 : h = 13 / 2) :
  v = 65 :=
  by (
```

## A.2 CodeContests

We report results on the 140 test set questions that do not include image tags in the problem description. We sample with a temperature of 0.6 and a top-p value of 0.95 following the experiments in CodeLlama [43]. We generate 10,000 samples per problem. We use two few-shot examples from the training set that are randomly sampled per-problem. We set 1024 as the max token length for the generated solution. We use the same answer comparison function as [37] and use the concatenation of public, private, and generated tests to validate correctness of solutions.

### Few-Shot Example

Q: Write python code to solve the following coding problem that obeys the constraints and passes the example test cases. The output code needs to read from and write to standard IO. Please wrap your code answer using ```:

Petya has equal...

...

(Rest of question and input/output examples)

...

A: ```

```
n = int(input())
a = int(input())
b = int(input())
ans = 6
cnt = 0
cur = 2
cnt += 2 * ((n - b) // a)
while cnt < 4:
    cur += 1
    cnt += (n // a)
ans = min(ans, cur)
if b * 2 <= n:
    cur, cnt = 0, 0
    cur = 1
    cnt += ((n - 2 * b) // a)
    while cnt < 4:
        cur += 1
        cnt += (n // a)
    ans = min(ans, cur)
print(ans)
```
```

...

### Example Prompt

Q: Write python code to solve the following coding problem that obeys the constraints and passes the example test cases. The output code needs to read from and write to standard IO. Please wrap your code answer using ```:

This is the...

...

(Rest of question and input/output examples)

...

A:

## A.3 MATH

We report results on 128 randomly selected test-set problems. We sample with a temperature of 0.6 and do not use nucleus sampling. We use the fixed 5 few-shot example from [36] for each problem.



We generate 10,000 samples per problem. We set 512 as the max token length for the generated solution. To grade solutions, we use the `minerva_math` functions from LMEval [21].

#### Few-Shot Example

Problem:

If  $\det \mathbf{A} = 2$  and  $\det \mathbf{B} = 12$ , then find  $\det(\mathbf{AB})$ .

Solution:

We have that  $\det(\mathbf{AB}) = (\det \mathbf{A})(\det \mathbf{B}) = (2)(12) = \boxed{24}$ . Final Answer: The final answer is 24. I hope it is correct.

#### Example Prompt

Problem:

What is the domain of the function

$$f(x) = \frac{(2x - 3)(2x + 5)}{(3x - 9)(3x + 6)} ?$$

Express your answer as an interval or as a union of intervals.

Solution:

### A.4 GSM8K

We report results on 128 randomly sampled test-set problems. We sample with a temperature of 0.6 and do not use nucleus sampling. We use 5 few-shot examples from the training set that are randomly sampled per-problem. We generate 10,000 samples per problem. We set 512 as the max token length for the generated solution. To grade solutions, we follow LMEval [21].

#### Few-Shot Example

Question: James decides to replace his car. He sold his \$20,000 car for 80% of its value and then was able to haggle to buy a \$30,000 sticker price car for 90% of its value. How much was he out of pocket?

Answer: He sold his car for  $20000 * .8 = \ll 20000 * .8 = 16000 \gg 16,000$  He bought the new car for  $30,000 * .9 = \ll 30000 * .9 = 27000 \gg 27,000$  That means he was out of pocket  $27,000 - 16,000 = \ll 27000 - 16000 = 11000 \gg 11,000$

#### 11000

#### Example Prompt

Question: Mary has 6 jars of sprinkles in her pantry. Each jar of sprinkles can decorate 8 cupcakes. Mary wants to bake enough cupcakes to use up all of her sprinkles. If each pan holds 12 cupcakes, how many pans worth of cupcakes should she bake?

Answer:

## B SWE-bench Lite

### B.1 Experimental Setup

For our experiments, we use DeepSeek-V2-Coder-Instruct with the Moatless Tools agent framework (at commit `a1017b78e3e69e7d205b1a3faa83a7d19fce3fa6`). We use Voyage AI [5] embeddings for retrieval, the default used by Moatless Tools. We make no modifications to the model or framework, using them entirely as off-the-shelf components.

With this setup, we sample 250 independent completions for each problem using standard temperature-based sampling. To determine the optimal sampling temperature, we conducted a sweep on a random subset of 50 problems from the test set, testing temperatures of 1.0, 1.4, 1.6, and 1.8. Based on these results, we selected a temperature of 1.6 for our main experiments.

### B.2 Test Suite Flakiness

During our analysis, we identified 34 problems in SWE-bench Lite whose test suites had flaky tests. Using the SWE-bench testing harness provided by the authors of SWE-bench, we tested each solution repeatedly: for some solutions, sometimes the solution was marked as correct, and other times it was marked as incorrect. In 30 of these 34 cases, we observed flakiness even on the correct solutions provided by the dataset authors. Table 3 lists the problem IDs of the 34 instances with flaky tests.

Table 3: Instance IDs of problems from SWE-bench Lite that have flaky tests.

| Repository   | Instance IDs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| django       | django__django-13315, django__django-13447, django__django-13590, django__django-13710, django__django-13757, django__django-13933, django__django-13964, django__django-14017, django__django-14238, django__django-14382, django__django-14608, django__django-14672, django__django-14752, django__django-14915, django__django-14997, django__django-14999, django__django-15320, django__django-15738, django__django-15790, django__django-15814, django__django-15819, django__django-16229, django__django-16379, django__django-16400, django__django-17051 |
| sympy        | sympy__sympy-13146, sympy__sympy-13177, sympy__sympy-16988                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| requests     | psf__requests-863, psf__requests-2317, psf__requests-2674, psf__requests-3362                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| scikit-learn | scikit-learn__scikit-learn-13241                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| matplotlib   | matplotlib__matplotlib-23987                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

An additional instance, `astropy__astropy-6938`, was flaky on some machines and not others. The authors of SWE-bench were able to reproduce the flakiness; however, we were unable to. Our preliminary investigation indicates this specific issue is due to unpinned versions of dependencies in the docker environments that run the unit tests.

Here, we include results on a subset with the problems in Table 3 removed (266 problems). For the full dataset evaluation, on any problem that has flaky tests, we run the test suite 11 times and use majority voting to determine whether a solution passed or failed. For the evaluation on the subset without flaky tests, all baselines we compare against release which problems they correctly solve, so we simply removed the problems with flaky tests and recomputed their scores.

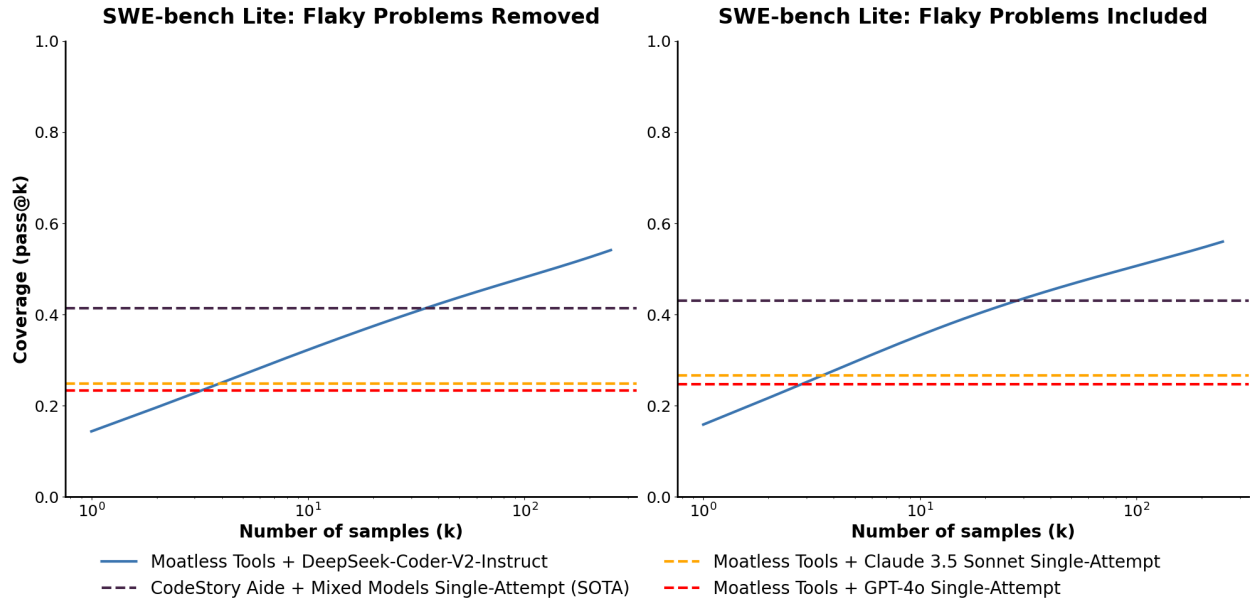


Figure 9: SWE-bench Lite results, without and with problems that have flaky tests. For the graph on the left, all problems in Table 3 are excluded. For the graph on the right, all problems are included. We note that the trend is the same with or without the flaky tests.

## C Scaling Law Details

### C.1 Experimental details

To fit exponentiated power laws to coverage curves, we first sample 40 points spaced evenly along a log scale from 0 to 10,000 and remove duplicates. We then use SciPy’s [51] `curve_fit` function to find the  $a$  and  $b$  parameters from Equation 3 that best fit these points.

### C.2 Additional results

In Figure 10, we show additional results fitting power laws to coverage curves for an expanded set of datasets and models.

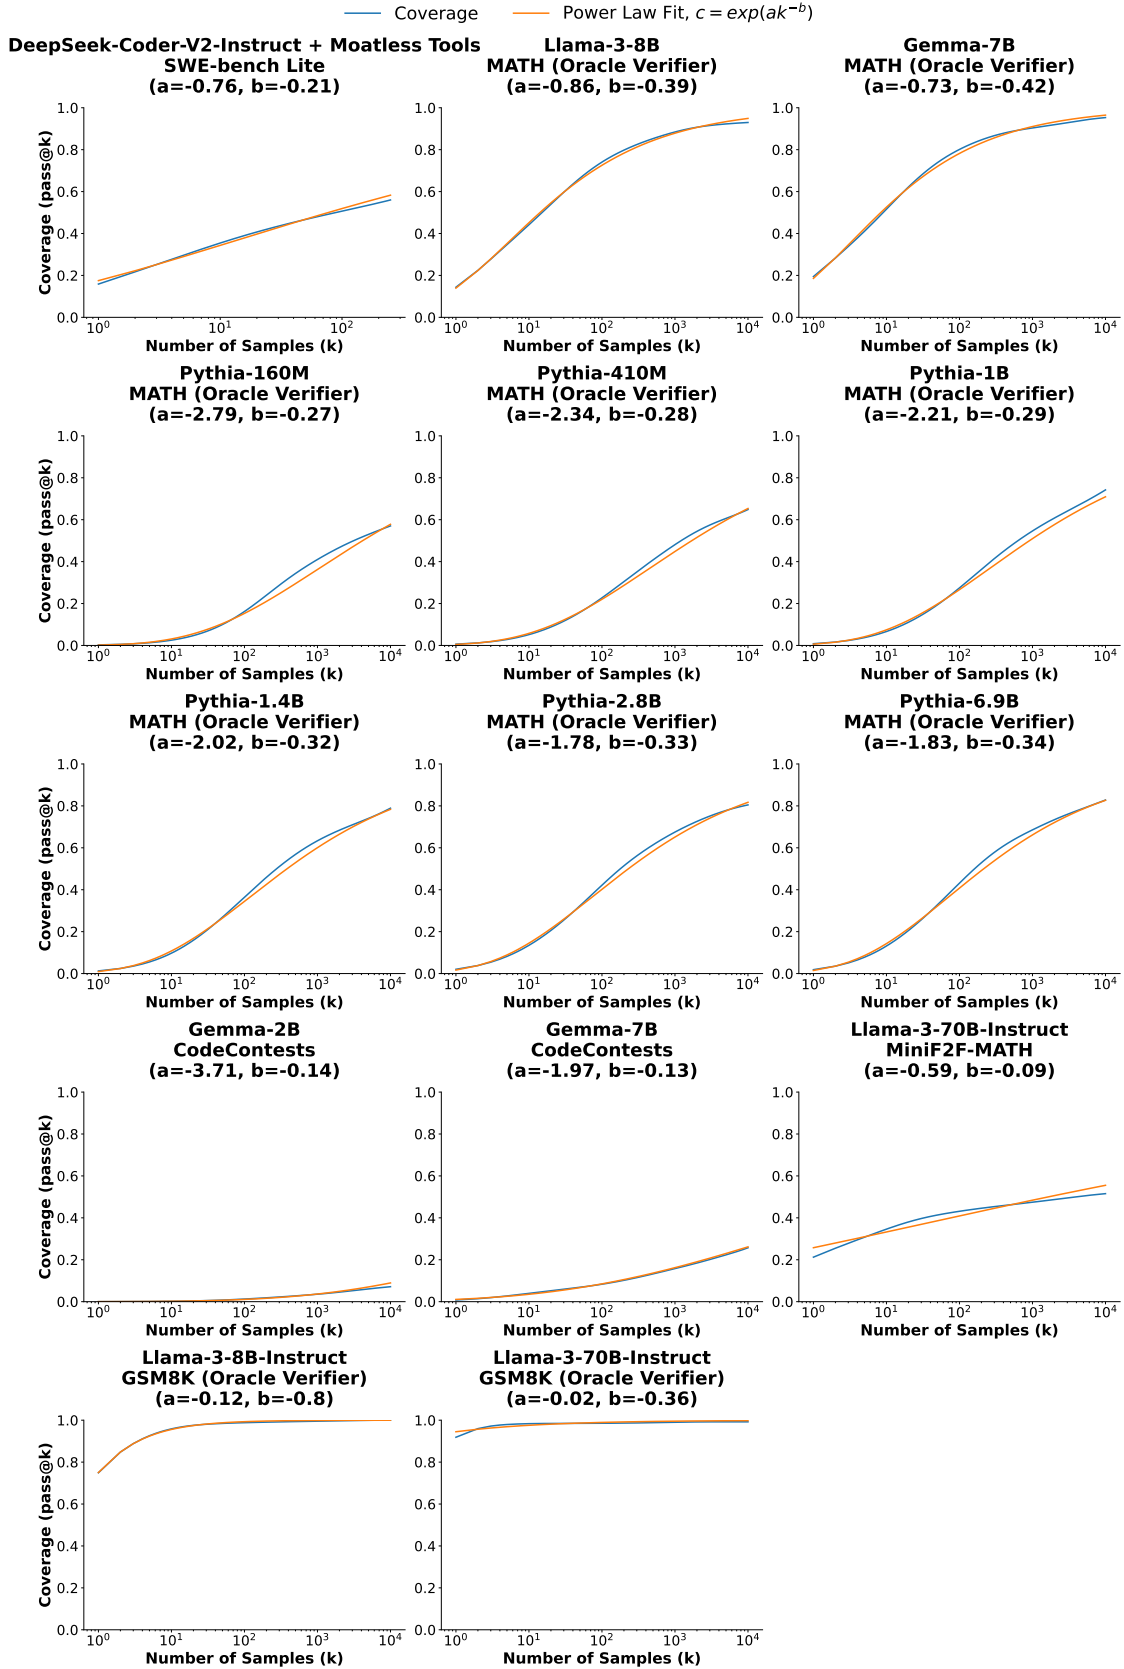


Figure 10: Fitting exponentiated power laws to coverage curves for an expanded set of tasks and models.

## D Precision Details

To calculate the Majority Vote, Reward Model + Best-of-N and Reward Model + Majority Vote metrics, we use the same 128 problem subsets for both MATH and GSM8K datasets introduced in Section 2. Each problem corresponds to 10,000 samples for each model we test. For each verification method, we take 100 random subsets of size  $k$  and calculate the success rate using each subset. We report the mean and standard deviation across subsets in Figure 7. To calculate the Majority Vote answer, we take the plurality answer in each subset. For the Reward Model + Best-of-N, we take the answer with the highest score assigned by the reward model. For the Reward Model + Majority Vote metric, we sum the reward model score across all the samples with the same final answer, and use the final answer with the highest sum.

## E GSM8K incorrect answer

As discussed in 4.1, we identify that a problem in the GSM8K test set (index 1042 on HuggingFace) has an incorrect ground truth solution.

### Question

Johnny's dad brought him to watch some horse racing and his dad bet money. On the first race, he lost \$5. On the second race, he won \$1 more than twice the amount he previously lost. On the third race, he lost 1.5 times as much as he won in the second race. How much did he lose on average that day?

### Answer

On the second race he won \$11 because  $1 + 5 \times 2 = \ll 1 + 5 * 2 = 11 \gg 11$   
On the third race he lost \$15 because  $10 \times 1.5 = \ll 10 * 1.5 = 15 \gg 15$   
He lost a total of \$20 on the first and third races because  $15 + 5 = \ll 15 + 5 = 20 \gg 20$   
He lost \$9 that day because  $11 - 20 = \ll 11 - 20 = -9 \gg -9$   
He lost an average of \$3 per race because  $9/3 = \ll 9/3 = 3 \gg 3$   
#### 3

The mistake is in the second line of the answer: on the third race, Johnny's dad lost \$16.5, not \$15, meaning he made \$11 and lost  $\$16.5 + \$5 = \$21.5$ . So, the answer is an average loss of \$3.5 per race, not \$3 per race (the answer in the dataset).